


Illuminated Refuge Conversion

Fast and simple upgrade kit

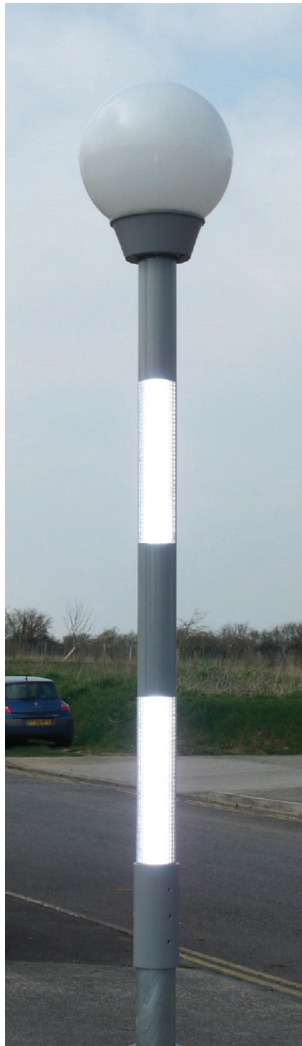

Sentinel26 - Part.No.RBCU-26

The Illuminated Refuge Beacon Conversion Unit has been designed to retro-fit to existing 76mm diameter Refuge Columns. This is an easy way to vastly upgrade an existing standard Refuge Beacon giving superior illumination and making the refuge much more visible to road users and improving safety.

Simple to install - Cut 1.25m off of the existing column, drop the cables down and slide over the new Illuminated Refuge Beacon Conversion Unit and secure with the locking screws.

The column section is constructed from strong, but lightweight aluminium extrusion with weather resistant polycarbonate lenses and is powder coated Traffic Grey.

It is internally illuminated in 2 double sided sections with 4 sets of LED's with total power consumption of approx. 14 watts. and comes with an IP67 LED Driver and with 2 No. highly reflective, translucent Bands.

The Pearl polyethylene globe is fixed to the Aluminium Anti-Vandal Gallery with 3no. M8 stainless steel security screws.

The globe houses our latest 12 watt LED Refuge Beacon (LED3-RF)

CE and EMC compliant



Specifications

- 26 watts power consumption
- Carbon emissions per unit = 0.123 metric tonnes per annum
- 300mm Pearl Polyethylene Globe
- 1.25m high as standard with 76mm socket
- Tough polyester powder coat finish in Traffic Grey gloss
- 2x Reflective/translucent white vinyl bands
- UMSUG Code 40 0026 0000 100



LOW CALL: 0333 666 2122
Tel : 01458 274017 • Fax : 01458 274145
email : info@fisherandcompany.co.uk
www.fisherandcompany.co.uk
www.feederpillars.com

1 - 4 Cary Court
Somerton Business Park
Somerton • Somerset
TA11 6SB • England

BLUE-8