


# Root Box

Simple, effective and excellent value

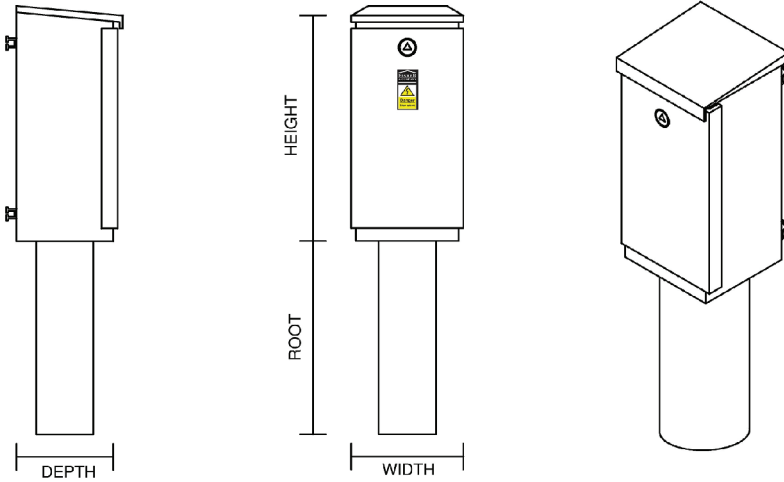

## Specification

- Designed to IP54
- Manufactured from 3mm HR4 mild steel plate and hot dipped galvanized to BS EN ISO1461
- Fitted with 12mm external grade treated plywood Back-board
- Supplied with Tri-Head locking
- Detachable door with weatherproof seal
- Supplied with an M8 brass earth bolt with nuts & washers on both body and door

The Root Box is ideal for situations such as providing a strong, safe housing for a cut-out supplying power to sign posts.

As its name suggests, it is rooted beside a sign post and secured to the post with 2 \*Tespa Bands, the cables can then be fed up through the root tube to the enclosure.

\*Tespa Bands not included but available as an extra

EXTERNAL DIMENSIONS	RB1
WIDTH	160
DEPTH	150
HEIGHT	340
ROOT	300 x 76ø
DOOR APERTURE WIDTH	120
DOOR APERTURE HEIGHT	280
BACKBOARD WIDTH X HEIGHT	150 x 300



**Tel: 0333 666 2122 (low rate)**  
 Tel : 01458 274017 • Fax : 01458 274145  
 email : [info@fisherandcompany.co.uk](mailto:info@fisherandcompany.co.uk)  
[www.fisherandcompany.co.uk](http://www.fisherandcompany.co.uk)  
[www.feederpillars.com](http://www.feederpillars.com)

1 - 4 Cary Court  
 Somerton Business Park  
 Somerton • Somerset  
 TA11 6SB • England